

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R4W



SE 1/16




SEC 9

U.S.B.&M.

S-12

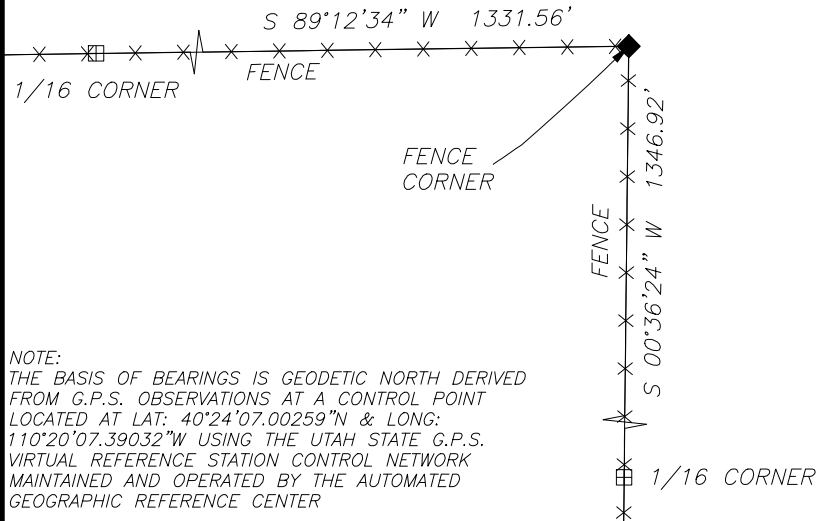

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT
LOCATED AT LAT: 40°24'07.00259"N & LONG:
110°20'07.39032"W USING THE UTAH STATE G.P.S.
VIRTUAL REFERENCE STATION CONTROL NETWORK
MAINTAINED AND OPERATED BY THE AUTOMATED
GEOGRAPHIC REFERENCE CENTER



SCALE: 1"=30'

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY EXISTING FENCE CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
THE ORIGINAL LOCATION OF THE CORNER

SET 5/8" X 24" REBAR WITH CAP STAMPED; 148951 ALONGSIDE FENCE CORNER AT 1/16 CORNER
REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7318637.19
E: 1964406.28

LATITUDE: 40°24'20.73624" N
LONGITUDE: 110°20'11.61453" W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0040W0_360520

CERTIFICATION

I Jerry D. Allred , Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 3 FEB '16

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

